

WPL EYELED CEL x3 ADJ 36W 2.7K 12D WHT



Item code 41400032

Product family EYELED

Series CEILING

Fixture voltage (V) 220-240

Fixture current (mA) 0.6

Fixture power (W) 3x36

CCT (K) 2700



General Characteristics

Power supply	INSIDE
Led power (W)	3x33
Fixture power (W)	3x36
CCT (K)	2700
Beam opening (°)	12
Orientability (°)	340 - 90
Colour type	WARM WHITE
LED type	COB

Dimensional Characteristics

Length (mm)	364
Width (mm)	124
Height (mm)	118


Performance

Led luminous flux (lm)	3x4220
Fixture luminous flux (lm)	3x3800
Led efficacy (lm/W)	128
Fixture efficacy (lm/W)	106
Luminous intensity (cd)	3x24692
CRI	85+
Average life time (h)	L80 50000h

Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	II
Fire protection	F
Photobiological group	0

Lighting performance

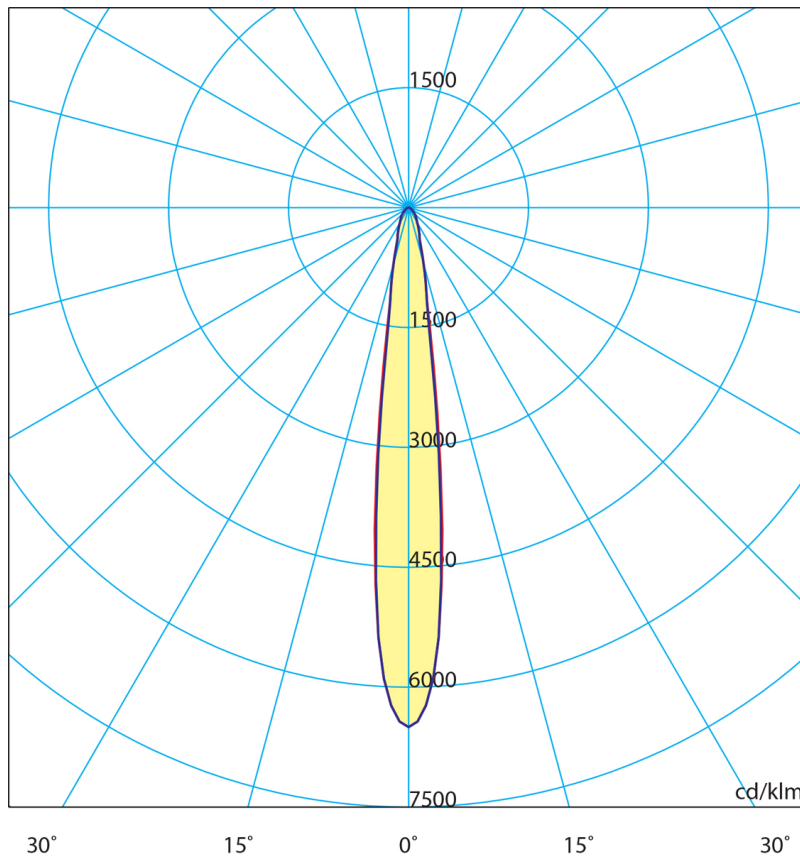

H[m]	D[m]	Max lux	Med lux	Alpha=7.1°+7.1°	G=00	
1.00	0.25	24692	16007			
2.00	0.49	6173	4002			
3.00	0.74	2744	1779			
4.00	0.99	1543	1000			
5.00	1.24	988	640			

Shipment characteristics

Barcode	8054890171823
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU