

WPL EYELED CEL x3 ADJ 36W 4K 40D WHT



Item code 41400035

Product family EYELED

Series CEILING

Fixture voltage (V) 220-240

Fixture current (mA) 0.6

Fixture power (W) 3x36

CCT (K) 4000



General Characteristics

Power supply	INSIDE
Led power (W)	3x33
Fixture power (W)	3x36
CCT (K)	4000
Beam opening (°)	40
Orientability (°)	340 - 90
Colour type	NATURAL WHITE
LED type	COB

Dimensional Characteristics

Length (mm)	364
Width (mm)	124
Height (mm)	118


Performance

Led luminous flux (lm)	3x4550
Fixture luminous flux (lm)	3x4100
Led efficacy (lm/W)	138
Fixture efficacy (lm/W)	114
Luminous intensity (cd)	3x6031
CRI	85+
Average life time (h)	L80 50000h

Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	II
Fire protection	F
Photobiological group	0

Lighting performance

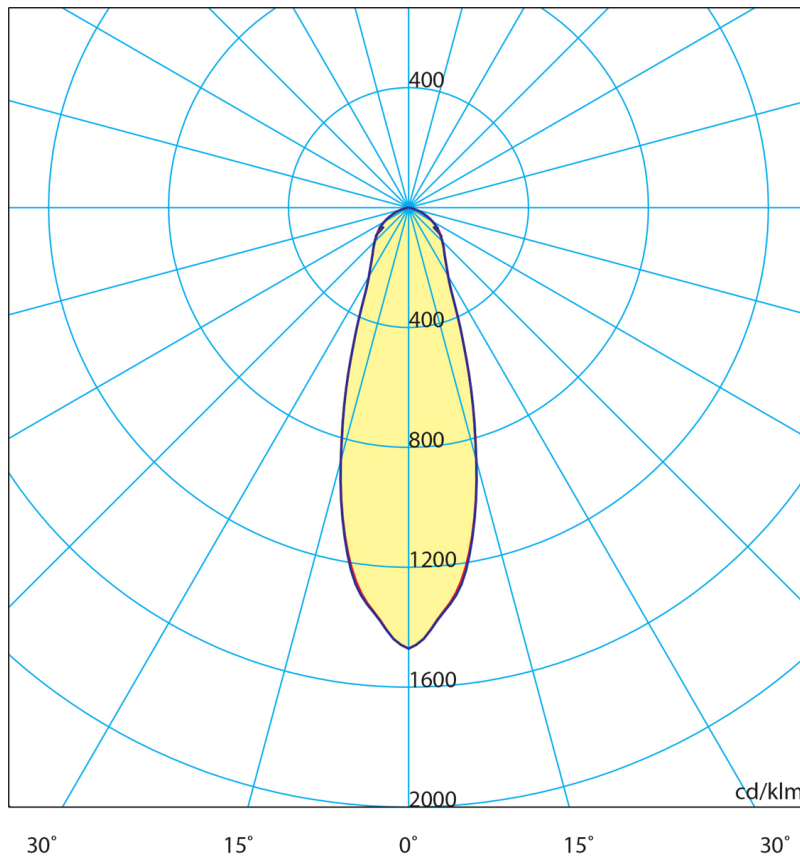

H[m]	D[m]	Max lux	Med lux	Alpha=17.3°+17.3°	G=00	
1.00	0.62	6031	3625			
2.00	1.25	1508	906			
3.00	1.87	670	403			
4.00	2.49	377	227			
5.00	3.11	241	145			

Shipment characteristics

Barcode	8054890171854
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU