

WPL EYELED DWL SQ TRIMLESS ADJ 25W 4K 12D WHT



Item code	41110056
Product family	EYELED
Series	DOWNLIGHT
Fixture voltage (V)	37
Fixture current (mA)	700
Fixture power (W)	25
CCT (K)	4000



General Characteristics

Power supply	NOT_INCLUDED
Fixture voltage (V)	37
Fixture current (mA)	700
Fixture power (W)	25
CCT (K)	4000
Beam opening (°)	12
Orientability (°)	340 - 90
Colour type	NATURAL WHITE
LED type	COB

Dimensional Characteristics

Length (mm)	152
Width (mm)	152
Height (mm)	103
Cutting size (mm)	156x156


Performance

Led luminous flux (lm)	3450
Fixture luminous flux (lm)	3100
LED efficacy (lm/W)	138
Fixture efficacy (lm/W)	124
Luminous intensity (cd)	20144
CRI	85+
Average life time (h)	L80 50000h

Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	III
Fire protection	F
Photobiological group	0

Lighting performance

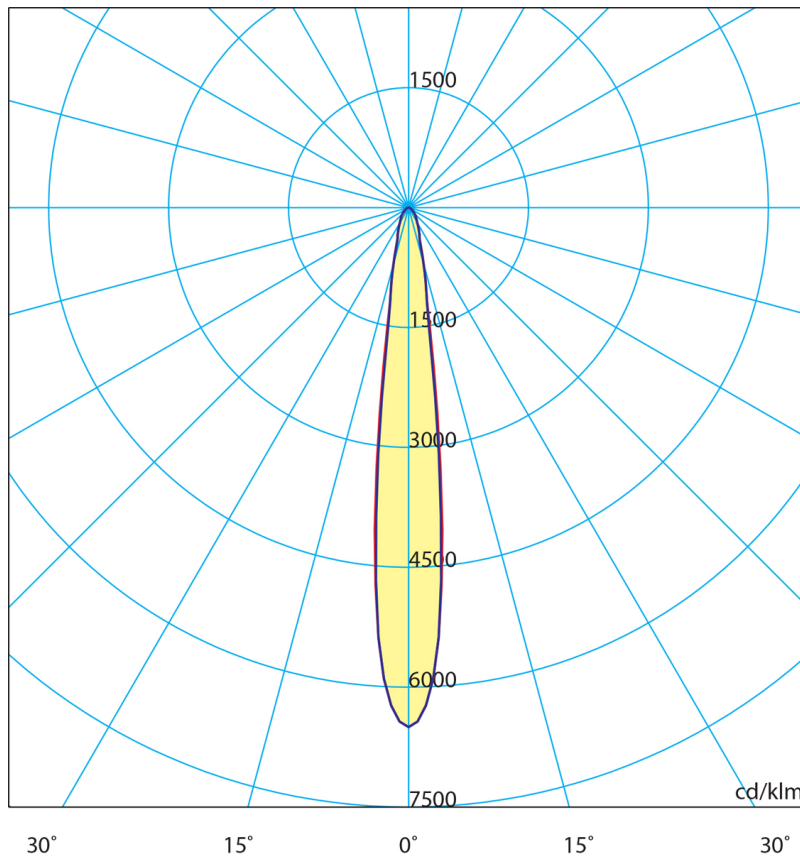

H[m]	D[m]	Max lux	Med lux	Alpha=7.1°+7.1°	G=00	
1.00	0.25	20144	13058			
2.00	0.49	5036	3264			
3.00	0.74	2238	1451			
4.00	0.99	1259	816			
5.00	1.24	806	522			

Note: In case of lighting fixture with more than one lighting source, the illuminance plane is referred to the single lighting source.

Shipment characteristics

Barcode	8054890171458
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 60598-2-2, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU