

# WPL EYELED DWL SQ x3 TRIMLESS ADJ 25W 2.7K 40D WHT



Item code	41110073
Product family	EYELED
Series	DOWNLIGHT
Fixture voltage (V)	3x37
Fixture current (mA)	3x700
Fixture power (W)	3x25
CCT (K)	2700



## General Characteristics

Power supply	NOT_INCLUDED
Fixture voltage (V)	3x37
Fixture current (mA)	3x700
Fixture power (W)	3x25
CCT (K)	2700
Beam opening (°)	40
Orientability (°)	340 - 90
Colour type	WARM WHITE
LED type	COB

## Dimensional Characteristics

Length (mm)	392
Width (mm)	152
Height (mm)	103
Cutting size (mm)	396x156

---

## Performance


Led luminous flux (lm)	3x3250
Fixture luminous flux (lm)	3x2900
LED efficacy (lm/W)	130
Fixture efficacy (lm/W)	116
Luminous intensity (cd)	3x4266
CRI	85+
Average life time (h)	L80 50000h

---

## Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	III
Fire protection	F
Photobiological group	0

## Lighting performance

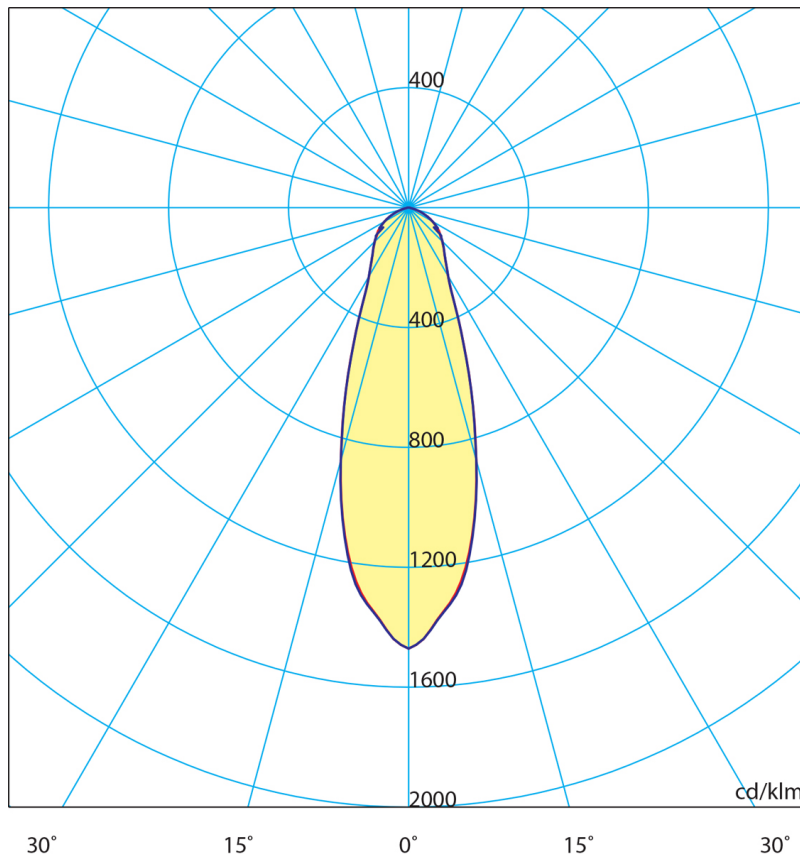

H[m]	D[m]	Max lux	Med lux	Alpha=17.3°+17.3°	G=00	
1.00	0.62	4266	2564			
2.00	1.25	1067	641			
3.00	1.87	474	285			
4.00	2.49	267	160			
5.00	3.11	171	103			

Note: In case of lighting fixture with more than one lighting source, the illuminance plane is referred to the single lighting source.

## Shipment characteristics

Barcode	8054890171618
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

---

## The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 60598-2-2, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU