

WPL EYELED DWL SQ x3 TRIMLESS ADJ 33W 2.7K 12D WHT



Item code	41110075
Product family	EYELED
Series	DOWNLIGHT
Fixture voltage (V)	3x37
Fixture current (mA)	3x900
Fixture power (W)	3x33
CCT (K)	2700



General Characteristics

Power supply	NOT_INCLUDED
Fixture voltage (V)	3x37
Fixture current (mA)	3x900
Fixture power (W)	3x33
CCT (K)	2700
Beam opening (°)	12
Orientability (°)	340 - 90
Colour type	WARM WHITE
LED type	COB

Dimensional Characteristics

Length (mm)	392
Width (mm)	152
Height (mm)	103
Cutting size (mm)	396x156


Performance

Led luminous flux (lm)	3x4220
Fixture luminous flux (lm)	3x3800
LED efficacy (lm/W)	128
Fixture efficacy (lm/W)	115
Luminous intensity (cd)	3x24692
CRI	85+
Average life time (h)	L80 50000h

Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	III
Fire protection	F
Photobiological group	0

Lighting performance

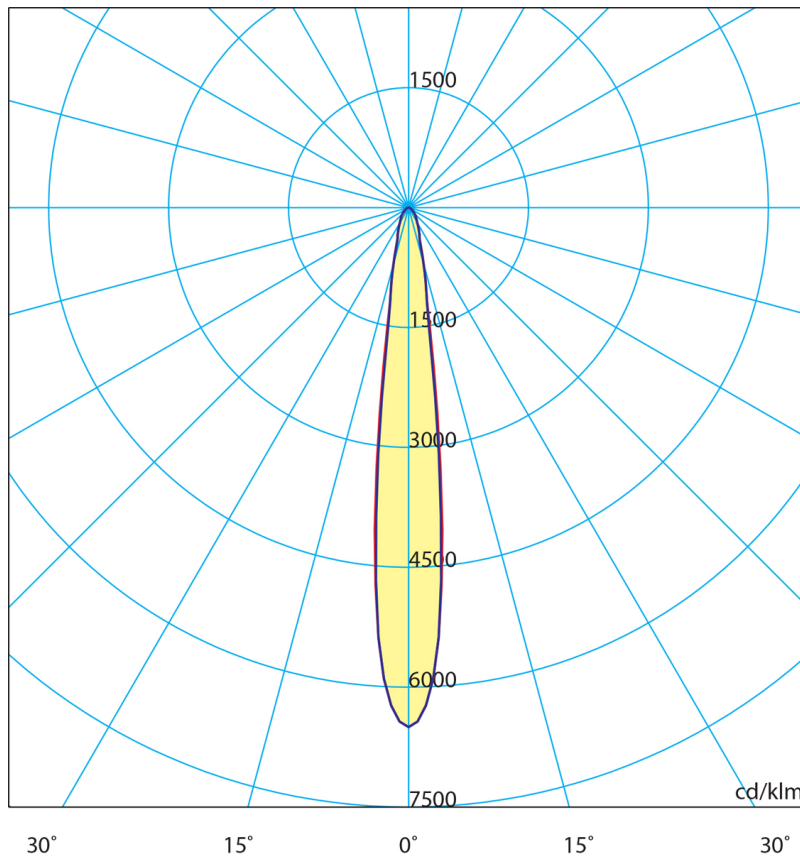

H[m]	D[m]	Max lux	Med lux	Alpha=7.1°x7.1°	G=00	
1.00	0.25	24692	16007			
2.00	0.49	6173	4002			
3.00	0.74	2744	1779			
4.00	0.99	1543	1000			
5.00	1.24	988	640			

Note: In case of lighting fixture with more than one lighting source, the illuminance plane is referred to the single lighting source.

Shipment characteristics

Barcode	8054890171632
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 60598-2-2, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU