

# WPL EYELED DWL SQ x3 TRIMLESS ADJ 33W 4K 12D WHT



Item code	41110076
Product family	EYELED
Series	DOWNLIGHT
Fixture voltage (V)	3x37
Fixture current (mA)	3x900
Fixture power (W)	3x33
CCT (K)	4000



## General Characteristics

Power supply	NOT_INCLUDED
Fixture voltage (V)	3x37
Fixture current (mA)	3x900
Fixture power (W)	3x33
CCT (K)	4000
Beam opening (°)	12
Orientability (°)	340 - 90
Colour type	NATURAL WHITE
LED type	COB

## Dimensional Characteristics

Length (mm)	392
Width (mm)	152
Height (mm)	103
Cutting size (mm)	396x156

---

## Performance


Led luminous flux (lm)	3x4550
Fixture luminous flux (lm)	3x4100
LED efficacy (lm/W)	138
Fixture efficacy (lm/W)	124
Luminous intensity (cd)	3x26642
CRI	85+
Average life time (h)	L80 50000h

---

## Others characteristics

Environmental temperature range (°C)	-25 +40
IP prtction	20
Electric protection	III
Fire protection	F
Photobiological group	0

## Lighting performance

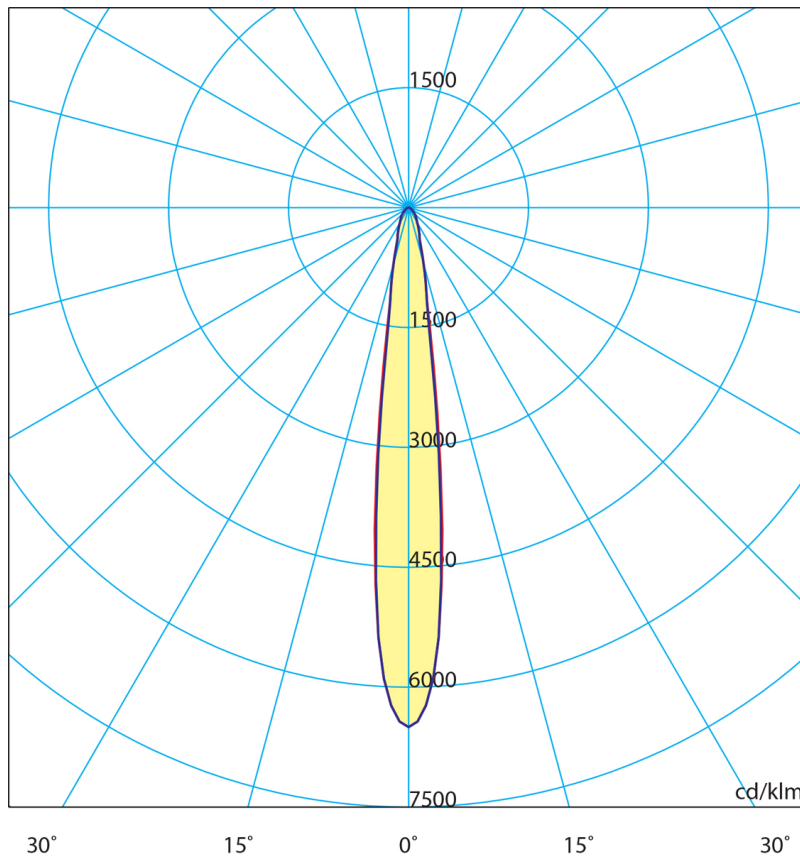

H[m]	D[m]	Max lux	Med lux	Alpha=7.1°x7.1°	G=00	
1.00	0.25	26642	17270			
2.00	0.49	6660	4318			
3.00	0.74	2960	1919			
4.00	0.99	1665	1079			
5.00	1.24	1066	691			

Note: In case of lighting fixture with more than one lighting source, the illuminance plane is referred to the single lighting source.

## Shipment characteristics

Barcode	8054890171649
Inner box (pcs)	1
Master box (pcs)	--
Fixture weight (Kg)	--

---

## The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 60598-2-2, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU