

## WPL EYELED CEL x3 ADJ 36W 4K 12D WHT



Item code 41400033

Product family EYELED

Series CEILING

Fixture voltage (V) 220-240

Fixture current (mA) 0.6

Fixture power (W) 3x36

CCT (K) 4000



### General Characteristics

|                   |               |
|-------------------|---------------|
| Power supply      | INSIDE        |
| Led power (W)     | 3x33          |
| Fixture power (W) | 3x36          |
| CCT (K)           | 4000          |
| Beam opening (°)  | 12            |
| Orientability (°) | 340 - 90      |
| Colour type       | NATURAL WHITE |
| LED type          | COB           |

## Dimensional Characteristics

|             |     |
|-------------|-----|
| Length (mm) | 364 |
| Width (mm)  | 124 |
| Height (mm) | 118 |

---

## Performance


|                            |            |
|----------------------------|------------|
| Led luminous flux (lm)     | 3x4550     |
| Fixture luminous flux (lm) | 3x4100     |
| Led efficacy (lm/W)        | 138        |
| Fixture efficacy (lm/W)    | 114        |
| Luminous intensity (cd)    | 3x26642    |
| CRI                        | 85+        |
| Average life time (h)      | L80 50000h |

---

## Others characteristics

|                                      |         |
|--------------------------------------|---------|
| Environmental temperature range (°C) | -25 +40 |
| IP prtction                          | 20      |
| Electric protection                  | II      |
| Fire protection                      | F       |
| Photobiological group                | 0       |

## Lighting performance

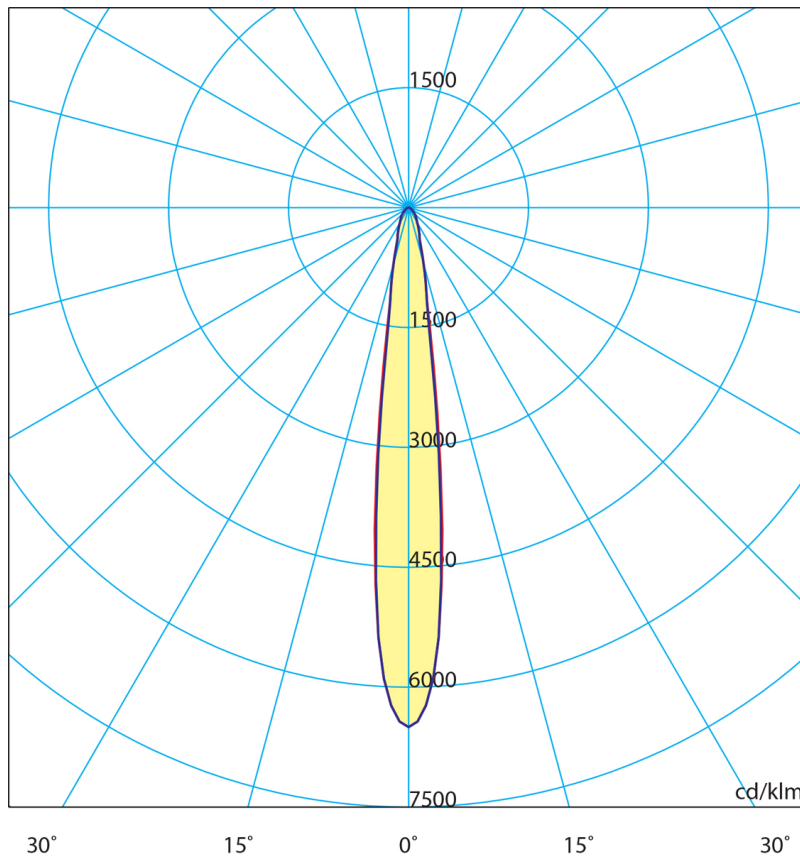

| H[m] | D[m] | Max lux | Med lux | Alpha=7.1°+7.1° | G=00 |  |
|------|------|---------|---------|-----------------|------|--|
| 1.00 | 0.25 | 26642   | 17270   |                 |      |  |
| 2.00 | 0.49 | 6660    | 4318    |                 |      |  |
| 3.00 | 0.74 | 2960    | 1919    |                 |      |  |
| 4.00 | 0.99 | 1665    | 1079    |                 |      |  |
| 5.00 | 1.24 | 1066    | 691     |                 |      |  |

## Shipment characteristics

|                     |               |
|---------------------|---------------|
| Barcode             | 8054890171830 |
| Inner box (pcs)     | 1             |
| Master box (pcs)    | --            |
| Fixture weight (Kg) | --            |

---

## The product is designed, manufactured, tested and verified in compliance to the following product European Directive, Regulation and Standards:

EN 61547, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 62471, IEC TR 62471-2, EN 62031+A1+A2, EN 60598-1, EN 55015+A1

2014/30/EU, 2011/65/EU, 2012/19/EU, 2010/30/EU, 874/2012/EU, 2009/125/EC, 1194/2012/EU